



PDX3 Clear Pendant Light

-Slim , Pure and Clear light

PDX3 clear Pendant light is specially designed for modern office. We have made radical structural saving by use the innovative LED technology and central injection of light into LGP. While light the panel light, The almost magical metamorphosis of the transparent optics into a light-emitting surface has happened, which bathes the room in light of unexpected .Soft glare-free light create a pleasant atmosphere, especially for communication and concentrated screen-based work. Soft and dynamic light create a unique experience.

- **Technology** Combines LED technology and Nano PMMA plate
- **Profile** Ultrathin modern style, the thickness is only 46mm (include driver). Both frame and panels are super simple style
- **Optics** Up-down half-half lighting. Upward light reflected by ceiling could provide soft ambient light to room which would reduce eye weariness.
- **Anti-glare** Light-emitting area is 10 times more than tube, and the brightness of luminaire surface is much lower. Special treatments has been done on the sides of LGP, no light leak, no glare.


Application

Office, Conference Room, Training Room


Specification

Model	PDX30036,PDX30054 , PDX30048	LED	Middle power , 2835
Power consumption	36W,54W,48W	Operating temperature range	-20< Ta < 40°C
Input	AC100-240V	Beam angle	Direct/indirect
Material	Housing:6063 aluminum, Optic: PMMA LGP	CCT	3000K , 4000K , 5000K, 6000K , 3000-6000K
IP grade	IP20	CRI	Ra>80
Color	Silver Grey	PF	>0.93
Finish	Anodizing	Dimming mode	RF opinonal
Driver	Integrated	L70	30000h@25°C
Installation	Suspending	Warranty	3 years

Dimensional drawing

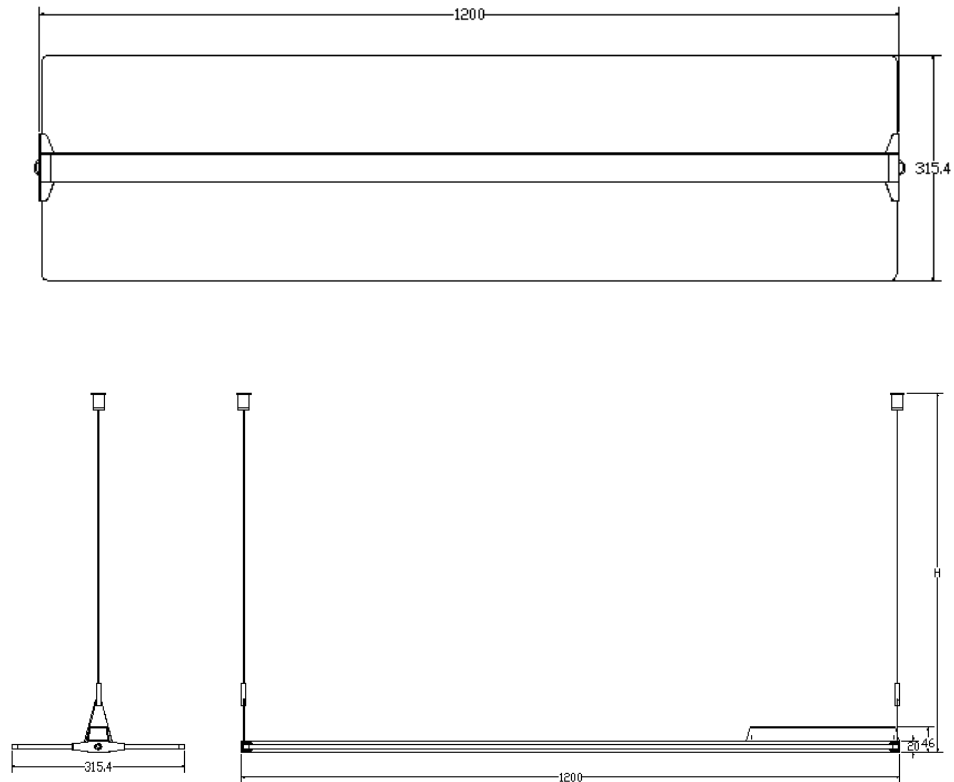

Photometric data

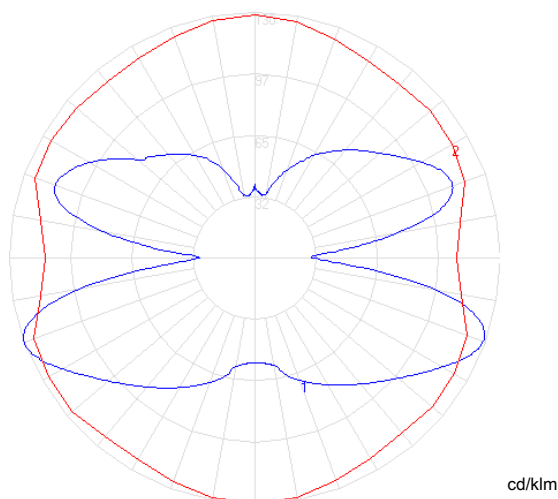

General information

Model	Order code	Product name	Power	Lumen	CCT	CRI ¹	Install
PDX30036	114600085	PDX3 LED clear pendant light	36W	2880lm	6000K	Ra>80	suspending
	114500085	PDX3 LED clear pendant light	36W	2880lm	5000K	Ra>80	suspending
	114400085	PDX3 LED clear pendant light	36W	2880lm	4000K	Ra>80	suspending
	114300085	PDX3 LED clear pendant light	36W	2700m	3000K	Ra>80	suspending
PDX30054	114600105	PDX3 LED clear pendant light	54W	4320m	6000K	Ra>80	suspending
	114500105	PDX3 LED clear pendant light	54W	4320lm	5000K	Ra>80	suspending
	114400105	PDX3 LED clear pendant light	54W	4320lm	4000K	Ra>80	suspending
	114300105	PDX3 LED clear pendant light	54W	4050lm	3000K	Ra>80	suspending
PDX30048	114C00106	PDX3 LED DIM clear pendant light	48W	3600lm	3000-6000K	Ra>80	suspending

¹ Only Ra>80 product information listed here, if need Ra>90, please contact us

Shanghai Inlity Lighting Electronics Co., Ltd

www.inlity.com

TEL : +86-21-37620335/6/7/8

FAX : +86-21-37620339